



Shielded Power Inductor-SD Series

FEATURES

- ROHS, Halogen free and REACH Compliance.
- Magnetic shielded.and unshielded,Miniature surface mount design.
- High current rating, low D.C Resistance.
- Various package size and wide inductance range.



APPLICATIONS

Portable computers, LED televisions, DC/DC converter and power supply for VTRs.

PRODUCT IDENTIFICATION



01 Type	
SD	SMD Power Inductor

02 External Dimensions (LxW)(mm)	
0402	6.6x 4.45
0804	12.95x 9.40
1306	18.54x 15.24

03 Shape	
D	Unshielded
T	Shielded

04 Nominal Inductance	
Example	Nominal value
4R7	4.7uH
470	47uH
471	470uH

05 Tolerance	
J	±5%
K	±10%
M	±20%

SHAPE AND DIMENSIONS

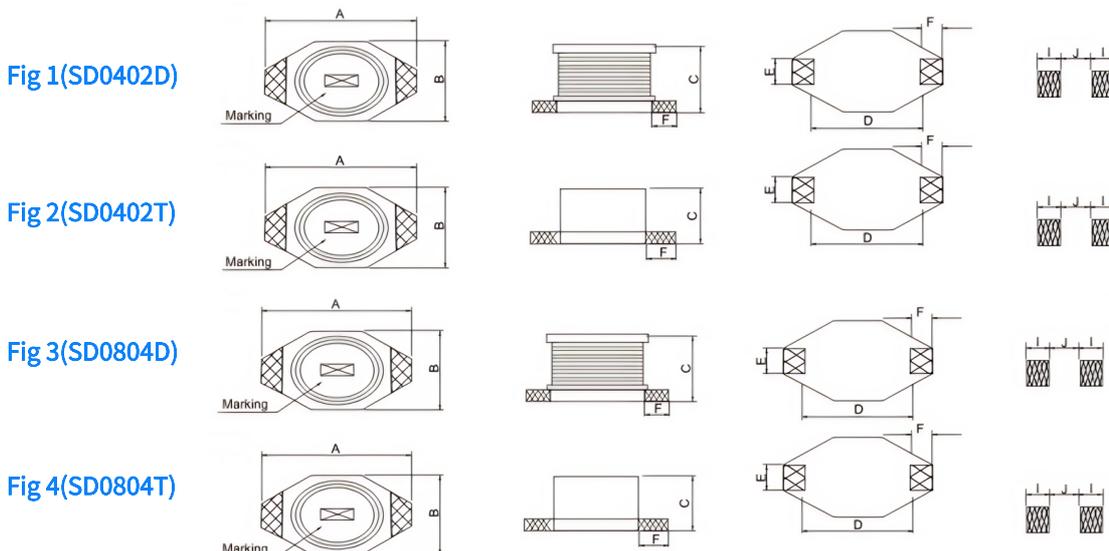


Fig 5(SD1306D)










Fig 6(SD1306T)



Part Number	Dimensions(mm)								
	A(Max)	B(Max)	C(Max)	D	E	F	I	J	Fig
SD0402D	6.6	4.45	2.92	4.32	1.27	1.02	1.40	4.08	1
SD0402T	6.6	4.45	2.92	4.32	1.27	1.02	1.40	4.08	2
SD0804D	12.95	9.40	5.21	7.62	2.54	2.54	2.92	7.37	3
SD0804T	12.95	9.40	5.21	7.62	2.54	2.54	2.92	7.37	4
SD1306D	18.54	15.24	7.11	12.7	2.54	2.54	2.92	12.45	5
SD1306T	18.54	15.24	7.11	12.70	2.54	2.54	2.92	12.45	6

RECOMMENDED PC BOARD PATTERN

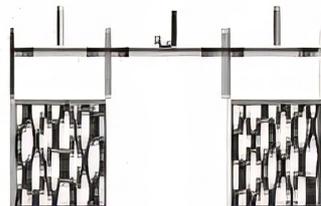

Part Number	Dimensions(mm)	
	I	J
SD0402D	1.40	4.08
SD0402T	1.40	4.08
SD0804D	2.92	7.37
SD0804T	2.92	7.37
SD1306D	2.92	12.45
SD1306T	2.92	12.45

SPECIFICATIONS

● SD0402D TYPE

Part Number	Inductance (uH)	Tolerance	Test condition (KHz/V)	DCR Max(Ω)	Rated Current Max (mA)
SD0402D-1R0	1.0	K、M	100/0.25	0.050	2900
SD0402D-1R5	1.5		100/0.25	0.055	2600
SD0402D-2R2	2.2		100/0.25	0.070	2300
SD0402D-3R3	3.3		100/0.25	0.080	2000
SD0402D-4R7	4.7		100/0.25	0.090	1500
SD0402D-6R8	6.8		100/0.25	0.130	1200
SD0402D-100	10		100/0.25	0.160	1100
SD0402D-150	15		100/0.25	0.230	900
SD0402D-220	22		100/0.25	0.370	700
SD0402D-330	33		100/0.25	0.510	580
SD0402D-470	47		100/0.25	0.760	500
SD0402D-680	68		100/0.25	1.10	400
SD0402D-101	100		100/0.25	2.00	310
SD0402D-151	150		100/0.25	3.50	270
SD0402D-221	220		100/0.25	4.00	220
SD0402D-331	330		100/0.25	5.50	180
SD0402D-471	470		100/0.25	7.50	160
SD0402D-681	680		100/0.25	15.0	140
SD0402D-102	1000		100/0.25	20.0	100

Note: When ordering, please specify tolerance code. Tolerance: K: $\pm 10\%$ 、M: $\pm 20\%$;

1. Operating temperature range -40 -125°C

2. Isat for Inductance drop 30% from its value without current

● SD0402T TYPE

Part Number	Inductance (uH)	Tolerance	Test condition (KHz/V)	DCR Max(Ω)	Rated Current Max (mA)
SD0402T-1R0	1.0	K、M	100/0.25	0.040	1400
SD0402T-1R5	1.5		100/0.25	0.045	1300
SD0402T-2R2	2.2		100/0.25	0.050	1100



Specifications subject to change without notice. Please check our website for latest information.

Tel: 0086-755-61350640 Fax: 0086-755-61350641 E-Mail: info@smdinductor.com Web: www.smdinductor.com

Part Number	Inductance (uH)	Tolerance	Test condition (KHz/V)	DCR Max(Ω)	Rated Current Max (mA)
SD0402T-3R3	3.3	K、M	100/0.25	0.055	1000
SD0402T-4R7	4.7		100/0.25	0.065	760
SD0402T-6R8	6.8		100/0.25	0.090	630
SD0402T-100	10		100/0.25	0.110	580
SD0402T-150	15		100/0.25	0.150	500
SD0402T-220	22		100/0.25	0.250	450
SD0402T-330	33		100/0.25	0.350	340
SD0402T-470	47		100/0.25	0.450	300
SD0402T-680	68		100/0.25	0.550	250
SD0402T-101	100		100/0.25	0.765	230
SD0402T-151	150		100/0.25	6.00	200
SD0402T-221	220		100/0.25	7.00	170
SD0402T-331	330		100/0.25	10.0	150
SD0402T-471	470		100/0.25	15.0	120
SD0402T-681	680		100/0.25	20.0	100
SD0402T-102	1000		100/0.25	25.0	70

Note: When ordering, please specify tolerance code. Tolerance: K: $\pm 10\%$, M: $\pm 20\%$;

1. Operating temperature range -40 -125°C

2. Isat for Inductance drop 30% from its value without current

● SD0804D TYPE

Part Number	Inductance (uH)	Tolerance	Test condition (KHz/V)	DCR Max(Ω)	Rated Current Max (mA)
SD0804D-1R0	1.0	K、M	100/0.25	0.009	9000
SD0804D-1R5	1.5		100/0.25	0.010	8000
SD0804D-2R2	2.2		100/0.25	0.012	7000
SD0804D-3R3	3.3		100/0.25	0.015	6400
SD0804D-4R7	4.7		100/0.25	0.018	5400
SD0804D-6R8	6.8		100/0.25	0.027	4600
SD0804D-100	10		100/0.25	0.038	3800
SD0804D-150	15		100/0.25	0.060	3000



Specifications subject to change without notice. Please check our website for latest information.

Tel: 0086-755-61350640 Fax: 0086-755-61350641 E-Mail: info@smdinductor.com Web: www.smdinductor.com

Part Number	Inductance (uH)	Tolerance	Test condition (KHz/V)	DCR Max(Ω)	Rated Current Max (mA)
SD0804D-220	22	K、M	100/0.25	0.085	2600
SD0804D-330	33		100/0.25	0.100	2000
SD0804D-470	47		100/0.25	0.140	1600
SD0804D-680	68		100/0.25	0.200	1400
SD0804D-101	100		100/0.25	0.280	1200
SD0804D-151	150		100/0.25	0.500	1000
SD0804D-221	220		100/0.25	0.610	800
SD0804D-331	330		100/0.25	1.02	600
SD0804D-471	470		100/0.25	1.27	500
SD0804D-681	680		100/0.25	2.02	400
SD0804D-102	1000		100/0.25	3.00	300

Note: When ordering, please specify tolerance code. Tolerance: K: ±10%、M: ±20%;

1. Operating temperature range -40 -125°C

2. Isat for Inductance drop 30% from its value without current

● SD0804T TYPE

Part Number	Inductance (uH)	Tolerance	Test condition (KHz/V)	DCR Max(Ω)	Rated Current Max (mA)
SD0804T-1R0	1.0	K、M	100/0.25	0.021	5600
SD0804T-1R5	1.5		100/0.25	0.022	5200
SD0804T-2R2	2.2		100/0.25	0.032	5000
SD0804T-3R3	3.3		100/0.25	0.039	3900
SD0804T-4R7	4.7		100/0.25	0.054	3200
SD0804T-6R8	6.8		100/0.25	0.075	2800
SD0804T-100	10		100/0.25	0.101	2400
SD0804T-150	15		100/0.25	0.150	2000
SD0804T-220	22		100/0.25	0.207	1600
SD0804T-330	33		100/0.25	0.334	1400
SD0804T-470	47		100/0.25	0.472	1000

Note: When ordering, please specify tolerance code. Tolerance: K: ±10%、M: ±20%;

1. Operating temperature range -40 -125°C

2. Isat for Inductance drop 30% from its value without current



Specifications subject to change without notice. Please check our website for latest information.

Tel: 0086-755-61350640 Fax: 0086-755-61350641 E-Mail: info@smdinductor.com Web: www.smdinductor.com

● SD1306D TYPE

Part Number	Inductance (uH)	Tolerance	Test condition (KHz/V)	DCR Max(Ω)	Rated Current Max (mA)
SD1306D-1R0	1.0	K、M	100/0.25	0.009	20000
SD1306D-2R2	2.2		100/0.25	0.014	16000
SD1306D-3R3	3.3		100/0.25	0.015	14000
SD1306D-5R6	5.6		100/0.25	0.020	12000
SD1306D-100	10		100/0.25	0.031	10000
SD1306D-150	15		100/0.25	0.036	8000
SD1306D-220	22		100/0.25	0.047	7000
SD1306D-330	33		100/0.25	0.066	5500
SD1306D-470	47		100/0.25	0.086	4500
SD1306D-680	68		100/0.25	0.130	3500
SD1306D-101	100		100/0.25	0.190	3000
SD1306D-151	150		100/0.25	0.320	2600
SD1306D-221	220		100/0.25	0.380	2400
SD1306D-331	330		100/0.25	0.560	1900
SD1306D-471	470		100/0.25	0.850	1400
SD1306D-681	680		100/0.25	1.10	1200
SD1306D-102	1000		100/0.25	1.80	1000
SD1306D-202	2000		100/0.25	4.50	300

Note: When ordering, please specify tolerance code. Tolerance: K: $\pm 10\%$ 、M: $\pm 20\%$;

1. Operating temperature range -40 -125°C

2. Isat for Inductance drop 30% from its value without current

● SD1306T TYPE

Part Number	Inductance (uH)	Tolerance	Test condition (KHz/V)	DCR Max(Ω)	Rated Current Max (mA)
SD1306T-100	10	K、M	100/0.25	0.040	8000
SD1306T-150	15		100/0.25	0.048	7000
SD1306T-220	22		100/0.25	0.059	6000
SD1306T-330	33		100/0.25	0.075	5000
SD1306T-470	47		100/0.25	0.097	4000
SD1306T-680	68		100/0.25	0.138	3000



Specifications subject to change without notice. Please check our website for latest information.

Tel: 0086-755-61350640 Fax: 0086-755-61350641 E-Mail: info@smdinductor.com Web: www.smdinductor.com

Part Number	Inductance (uH)	Tolerance	Test condition (KHz/V)	DCR Max(Ω)	Rated Current Max (mA)
SD1306T-101	100	K、M	100/0.25	0.207	2400
SD1306T-151	150		100/0.25	0.293	2100
SD1306T-221	220		100/0.25	0.470	1900
SD1306T-331	330		100/0.25	0.780	1100
SD1306T-471	470		100/0.25	1.08	1000
SD1306T-681	680		100/0.25	1.40	960
SD1306T-102	1000		100/0.25	2.01	800

Note: When ordering, please specify tolerance code. Tolerance: K: $\pm 10\%$, M: $\pm 20\%$;

1. Operating temperature range -40 -125°C

2. Isat for Inductance drop 30% from its value without current

PACKAGING SPECIFICATIONS

Tape Dimensions

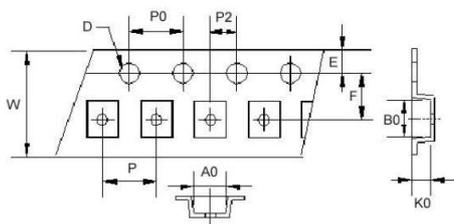


Figure 1

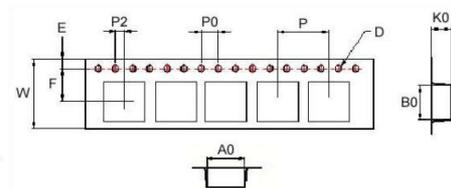


Figure 2

Reel Dimensions

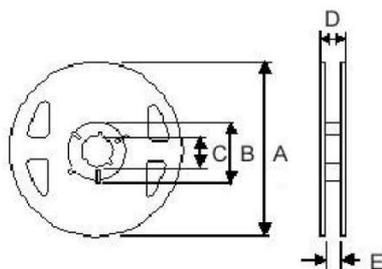


Figure 3

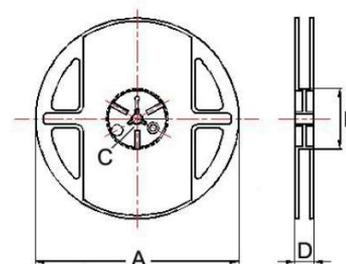


Figure 4




DETAIL ELECTRICAL CHARACTERISTICS

1. Operating temperature range: -40 to + 105°C(Includes temperature when the coil is heated) .
2. External appearance: On visual inspection, the coil has no external defects.
3. Terminal strength: After soldering. Between copper plate and terminals of coil. Push in two directions of X.Y


withstanding at below conditions.

Terminal should not peel off. (refer to figure at right) 5. 0N 60 sec.



4. Insulating resistance: Over 100MΩ at 100V D.C. between coil and core.
5. Dielectric strength: No dielectric breakdown at 100V D.C. for 1 minute between coil and core.
6. Temperature characteristics: Inductance coefficient $(0\sim 2,000)\times 10^{-6}/^{\circ}\text{C}$ (-25~+80°C degree Celsius), inductance deviation within $\pm 5.0\%$, after 96 hours.
7. Humidity characteristics(Moisture Resistance): Inductance deviation within $\pm 5\%$, after 96 hours in 90~95% relative humidity at $40 \pm 2^{\circ}\text{C}$ and 1 hour drying under normal condition.
8. Vibration resistance: Inductance deviation within $\pm 5\%$, after vibration for 1 hour. In each of three orientations at sweep vibration (10~55~10 Hz) with 1.5mm P-P amplitudes.
9. Shock resistance: Inductance deviation within $\pm 5\%$, after being dropped once with 981m/s^2 (100G) shock attitude upon a rubber block method shock testing machine, in three different orientations.
10. Resistance to Soldering Heat: 260°C, 10 seconds(See attached recommend reflow) .
11. Storage condition: Temperature Range: 0°C ~ 35°C; -40°C ~ 105°C (after PCB), Humidity Range: 50% ~ 70% RH.
12. Use components within 12 months. If 12 months or more have elapsed, check solderability before use.
13. Reflow profile recommend:

Lead-free heat endurance test

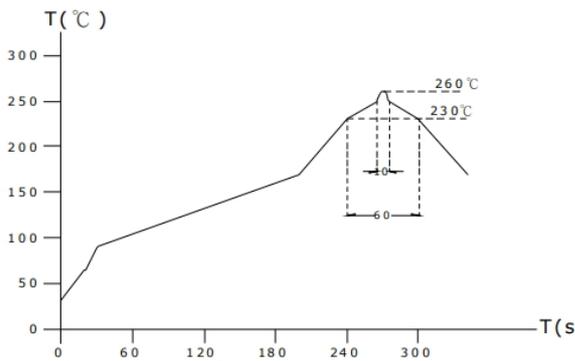

Lead-free the recommended reflow condition

